

CUSTOMER FEATURES HIGHLIGHTS

Be sure you understand and can operate the following:

- **Air conditioning system:**
 - Review defogging and defrosting procedures.
- **Tire Pressure Monitoring System:**
 - Make sure the customer knows what each icon means.
- **Windshield wiper/washer controls:**
 - Make sure the customer can wash the windshield and understands how to adjust time on intermittent setting (if equipped).
- **Audio system operation:**
 - Make sure radio stations are pre-set and the customer knows how to set them.
- **Explain the first service procedure.**
- **America's Best Warranty™**
- **Address the customer's recurring questions.**

I. APPROACHING THE VEHICLE—*Have the customer take and operate the keys, remote keyless entry system and security system*

- **Keys:** Every Accent has two keys that work in every lock.
NOTE: If you use a key to unlock a door and the security system is armed, opening the door will activate the alarm.
- **Remote keyless entry system** (if equipped): Includes two remote keyless entry fobs:

UNLOCK

Press (unlock icon) once to disarm the alarm and unlock the driver's door.

Press (unlock icon) twice within four seconds to unlock all doors.

PANIC FEATURE

Press and hold (panic icon) on the back of the fob to activate the horn and flashing lights for 30 seconds; press again to turn off Panic Mode:

- Your customers can use this in a parking lot as a vehicle locator.

ADDITIONAL FEATURES

- **Alloy wheels** (if equipped): Improve looks, dissipate brake heat more efficiently, lighter weight improves fuel economy and handling.
- **Aerodynamic styling:** Reduces wind resistance for quieter cabin and enhanced efficiency.
- **Locking fuel-filler door:** On the driver's side for convenience and security.



II. ENTERING—*Help your customer make the adjustments when they sit in the vehicle*

- **Front seat adjustments:**
 - **Headrest height:** Pull up to raise; to lower, press the lock knob while pressing down on the headrest.
 - **Seat forward and back**
 - **Seat height**
 - **Seatback angle**
- **Seatbelts:** Adjust the belt height so it lies across your chest and midway over your shoulder nearest the door and not your neck:
 - To raise, pull it up.
 - To lower, push it down while pressing the height adjuster button.
- **Power windows** (if equipped):
 - **Auto up/down** (driver's side only)—controlled by main switch:
 - Press AUTO switch fully down to completely open the driver's window.
 - To fully close the driver's window automatically, pull the AUTO switch fully up.
 - To stop the window at any desired position while the window is moving, pull up or down then release the AUTO switch.




Mirrors:

Outside: To adjust the position of either mirror: Move selecting switch to L (left) or R (right), adjust mirror angle by pressing the appropriate direction on the perimeter switch.





III. DRIVING POSITIONING—*Help your customer make these adjustments before taking a test-drive in the vehicle*

- **Tilt steering wheel:** Adjust *before* driving:
Tilt: Push lever downwards, adjust the steering wheel to the desired position, securely tighten the lever by pulling up and make sure the steering wheel locks in place.




IV. DRIVER CONTROLS AND INCLEMENT WEATHER—*Explain these features before the test-drive*

- **Transmission:**
 - **Automatic transmission** (if equipped):
 - Foot must be on the brake pedal with the engine running to move the shift selector.
 - Move the shift lever to the selected gear.
 - **5-speed manual transmission** (if equipped):
 - The clutch pedal must be depressed to start the engine.
 - To shift into Reverse, lift the collar tab up and then shift into the Reverse gear position.
- **Headlights:**
 - Rotate the switch to operate:
 - **High beam activation:** Push the lever forward.
 - **Flash feature:** Pull the lever toward you and release.
- **Fog light switch** (if equipped):
 - Push in to switch on.



NOTE: Fog lights only function when low beams are on.


- **Windshield wipers:**
 - **Front:** Move wiper/washer switch to one of the four positions:
 - **MIST:** Move the switch upward to allow the wipers to make a single wipe to clear any mist on the windshield.
 - **INT (Intermittent):** Move the switch downward to first position—wiper speed may be varied by rotating the "INT TIME" switch: "F" allows less time between wipes, "S" allows more time between wipes.
 - **LO:** Second downward position for low-speed operation.
 - **HI:** Third downward position for high-speed operation.



IV. DRIVER CONTROLS AND INCLEMENT WEATHER (continued)


Wiper/washer operation:

- Pull the wiper/washer lever towards you.
- When the washer is activated, the wipers automatically make two passes.
- The washer continues to operate until the lever is released.




Rear wiper/washer (3-door models):

- To turn ON: Rotate the wiper stalk up one position; the rear wiper will run continuously.
- To use the washer: Rotate the wiper stalk up two positions.
- To wash with two or three wipes: Rotate the wiper stalk down one position.




V. COMFORT AND CONVENIENCE—Features that enhance the driving experience

Heater/ventilation/air conditioning:

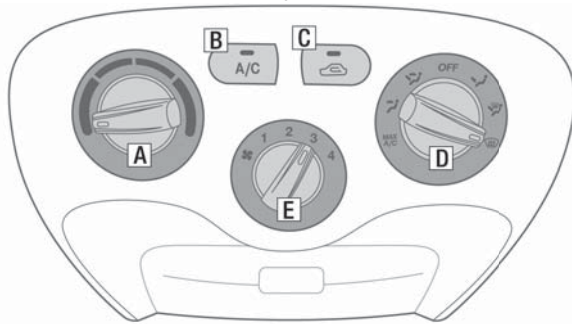

- **Temperature control switch:** Turn left for cooler temperatures, turn right for warmer temperatures.
- **Air conditioning:** Push to turn the air conditioning on or off.
- **Air intake control switch:** Air from within the passenger compartment is drawn through the heating system and is heated or cooled according to the other functions selected.
- **Airflow control:** Directs the flow of air.
- **Blower fan control switch:** Select blower fan speed.
- **Defrosting and defogging:**
 1. Set the mode selection knob to the defrost position (if equipped).
 2. Set the temperature control to the desired setting.
 3. Set the fan speed control to position 3 or 4.

Audio system:

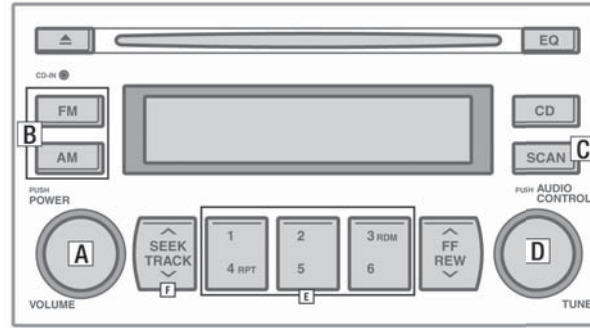

Setting preset memory buttons (AM, FM or XM):

1. Press the power button.
2. Select AM, FM or XM.
3. Tune the audio control knob to the desired channel.
4. Press and hold any preset button (1–6) until an audible beep is heard.

NOTE: FM has two bands for up to 12 presets. XM has three bands for up to 18 presets.

XM category search

1. While in XM mode, press the DIR ▲ or CAT ▼ to scroll through music categories.
2. Press the audio control knob to select the desired category.

NOTE: XM® Satellite Radio needs a clear view of the southern sky to ensure good reception. The trial XM® subscription ends three months following the vehicle date of sale. Your customer should contact XM® Satellite Radio at 1-800-XM-RADIO (1-800-967-2346) to renew their XM subscription. For more XM® Satellite Radio information, call 1-800-XM-RADIO (1-800-967-2346) or go online at XMRadio.com.

VI. KIDS AND CARGO—Rear seat features, cargo options and trunk features

- **60/40 split fold-down rear seat:** One side can be folded for cargo while the other remains up for a passenger.


- **Adjusting the seatback angle** (3-door only):

- Pull up on the lever and move the seatback to the desired position.
- After adjusting, check that it is securely locked into place.



- **Rear door entry** (3-door only):

- To tilt the front passenger seat and move forward, pull up on the recliner control lever.
- From the rear seat, press the foot lever.



- **Folding rear seatback and seat cushion** (3-door only):

- Pull the strap at the front of the seat cushion upward and fold up the lower seat cushion.



- Remove the headrests and put them in the loops on the back of the seat cushion.



- Pull up on the lever and fold down the rear seatback.



- **Rear cup holders** (if equipped): Located in the center of the rear seat armrest.
- **Child-proof rear door locks:** Can be set so rear doors cannot be opened from the inside.
- **Trunk cargo capacity:**
 - 4-door sedan: 12.4 cubic feet
 - 3-door hatchback: 15.9 cubic feet
 - There is a glow-in-the-dark trunk release inside the trunk (4-door only).

VII. SECURITY SYSTEM


- **Steering wheel lock:** Locks automatically when the ignition key is turned to the LOCK position.
- **After exiting—how to lock doors with remote keyless system:**
 - Push (lock icon) once on the fob to lock all doors.
 - Push (lock icon) a second time to hear a confirmation chirp and for the lights to flash.

- **Fuel-filler door—refueling (driver's side):**

1. Pull the fuel release lever.
2. Remove the fuel cap.
3. Pump fuel (regular 87 octane): 11.9-gallon capacity.
4. Replace the fuel cap tightly: minimum 3–5 clicks.
5. Close the fuel door.



*NOTE: After adding fuel, always reinstall the fuel cap fully and make sure it clicks a minimum of 3–5 times. Failure to do this may result in the **Check Engine** light illuminating.*

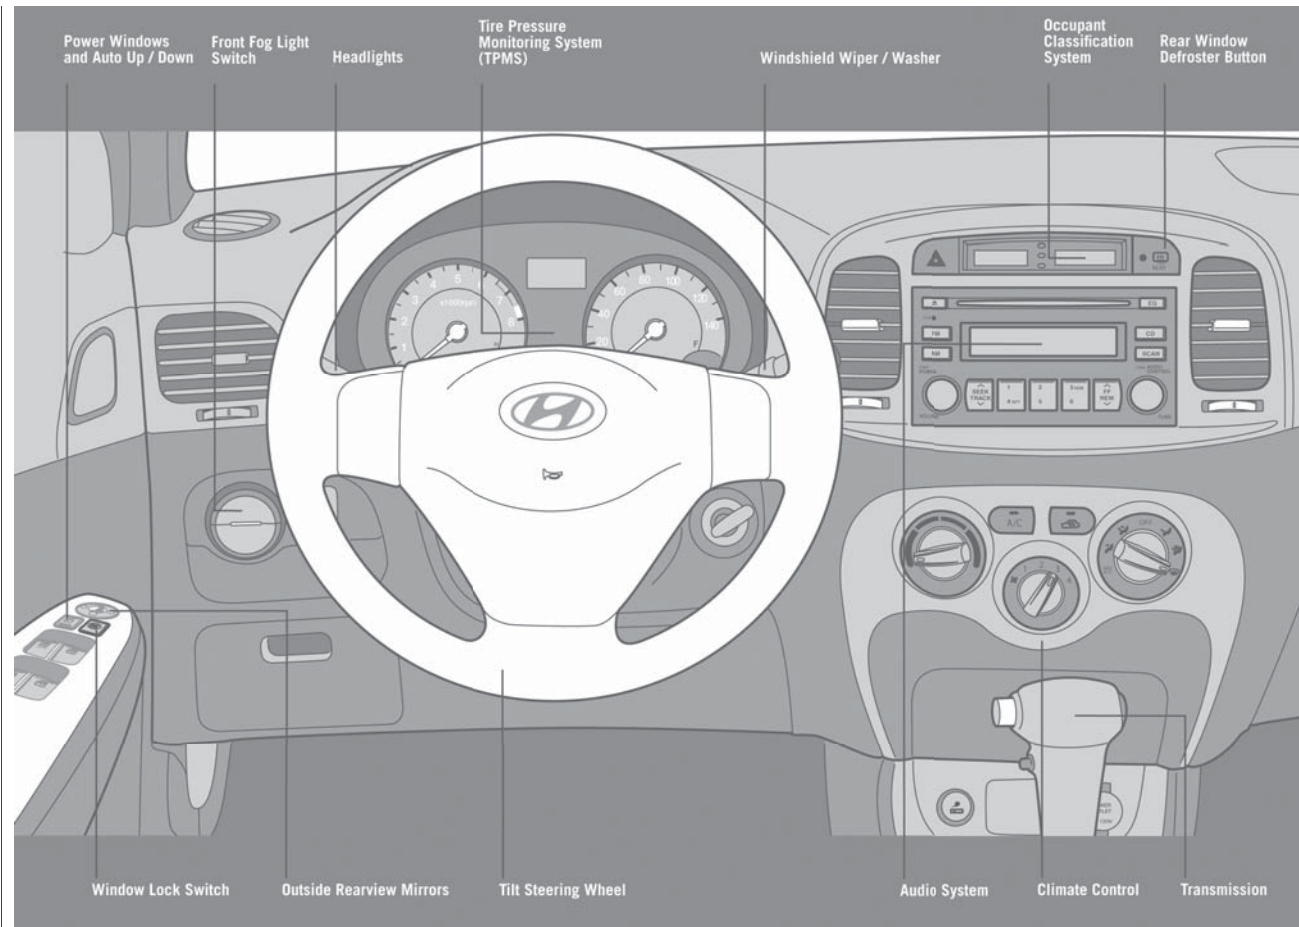

VIII. INSTRUMENT PANEL—*What you see from the driver's seat*

Directly in front of driver:

Instruments:

- **Trip computer** (if equipped)
- **Tire Pressure Monitoring System (TPMS):**
 - **Low Tire Pressure Indicator light:** Illuminates when one or more of the tires is significantly under-inflated. Safely park the car and check the tires as soon as possible; inflate them to the proper pressure.
 - **TPMS Malfunction Indicator light:** Illuminates and stays illuminated when there is a malfunction with the TPMS. Have the system checked by an authorized Hyundai dealer as soon as possible.



- **Stalk-mounted controls:**

- Left-hand stalk: turn signals and headlights
- Right-hand stalk: windshield wiper/washer

- **Center of instrument panel—upper portion:**

- Audio controls
- Clock adjustment

- **Center of instrument panel—lower portion:**

- Heater/ventilation/air conditioning controls