

## **Electrochromic Auto-Dimming Mirror with HomeLink® and Compass (IQS) (if equipped)**

---



Electrochromic is an automatic-dimming night vision interior mirror. During nighttime driving, this feature automatically detects and reduces rearview mirror glare. Models with this type of mirror also come with an integrated HomeLink® Universal Transceiver and compass. HomeLink® allows the owner to program up to three buttons on the mirror to activate garage door(s), estate gate, home lighting, etc. The mirror actually learns the codes from the owner's existing transmitters.

### **Basic HomeLink® Programming Instructions**

---

Be sure to help your customer program HomeLink® to ensure that it's done right the first time:

1. Ignition key should be in the "ON" position.
2. For first-time programming: Press and hold the two outside HomeLink® buttons (buttons one and three) until the indicator light (located on the face of the mirror between HomeLink® buttons two and three) begins to flash (after 20 seconds). Release both buttons. Do not repeat Step 1 to program the remaining two HomeLink® buttons.
3. Position the end of your hand-held transmitter one to three inches away from the HomeLink® surface, keeping the indicator light in view. (NOTE: A weak battery in the remote unit will cause problems in programming.)
4. Using both hands, simultaneously push the hand-held transmitter button and the desired HomeLink® button. DO NOT release the buttons until Step 4 has been completed.

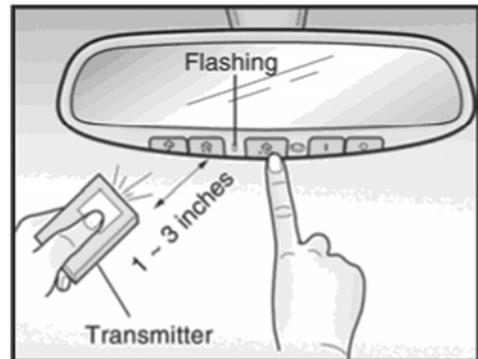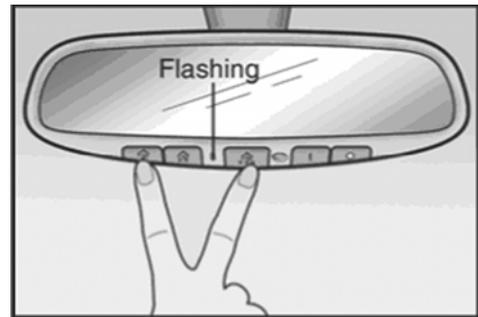

5. Continue to hold down both buttons until the HomeLink® indicator light flashes, first slowly, then rapidly. When the indicator light flashes rapidly, both buttons may be released. The rapidly flashing light indicates successful programming of the new frequency signal.
6. Press and hold the just-trained HomeLink® button. If the indicator light blinks rapidly for two seconds and turns solid, proceed to "Rolling Code Programming," which customers will need to complete at their homes. If the indicator light is solid, programming is complete. To program additional devices to the remaining HomeLink® buttons, begin with "Programming" Step 2.

---

**Note 1:** For additional assistance, the HomeLink® manufacturer can be contacted at Johnson Controls, telephone 1-800-355-3515. Easy programming instructions and downloadable videos are also available at [www.homelink.com](http://www.homelink.com).

**Note 2:** Complete programming information is in the Owner's Manual.